

SANDIA REPORT SAND85—0957 • Unlimited Release • UC—60
Printed April 1986

Aeroelastic Effects in the Structural Dynamic Analysis of Vertical Axis Wind Turbines

D. W. Lobitz, T. D. Ashwill

Prepared by
Sandia National Laboratories
Albuquerque, New Mexico 87185 and Livermore, California 94550
for the United States Department of Energy
under Contract DE-AC04-76DP00789

Issued by Sandia National Laboratories, operated for the United States Department of Energy by Sandia Corporation.

NOTICE: This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government, any agency thereof or any of their contractors or subcontractors. The views and opinions expressed herein do not necessarily state or reflect those of the United States Government, any agency thereof or any of their contractors or subcontractors.

Printed in the United States of America
Available from
National Technical Information Service
U.S. Department of Commerce
5285 Port Royal Road
Springfield, VA 22161

NTIS price codes
Printed copy: A02
Microfiche copy: A01

AEROELASTIC EFFECTS IN THE STRUCTURAL DYNAMIC
ANALYSIS OF VERTICAL AXIS WIND TURBINES*

D. W. Lobitz and T. D. Ashwill
Sandia National Laboratories
Albuquerque, New Mexico 87185

ABSTRACT

Aeroelastic effects impact the structural dynamic behavior of vertical axis wind turbines (VAWTs) in two major ways. First, the stability phenomena of flutter and divergence are direct results of the aeroelasticity of the structure. Secondly, aerodynamic damping can be important for predicting response levels, particularly near resonance, but also for off-resonance conditions. The inclusion of the aeroelasticity is carried out by modifying the damping and stiffness matrices in the NASTRAN finite element code. Through the use of a specially designed preprocessor, which reads the usual NASTRAN input deck and adds appropriate cards to it, the incorporation of the aeroelastic effects has been made relatively transparent to the user. NASTRAN flutter predictions are validated using field measurements and the effect of aerodynamic damping is demonstrated through an application to the Test Bed VAWT being designed at Sandia.

*This work performed at Sandia National Laboratories is supported by the U.S. Department of Energy under Contract Number DE-AC04-76D00789.

INTRODUCTION

The aeroelastic analysis of wind turbines is entirely similar to that done for subsonic aircraft wing structures, and most of the theory that has been developed for those structures carries over directly. The essence of aeroelastic behavior is that the aerodynamic loads depend on motions of the structure which change the angle of attack. As an example, for a horizontal wing structure, wing velocities in the vertical direction change the angle of attack in such a way that the motion is resisted by the induced aerodynamic loads. This type of motion produces aerodynamic damping. Alternatively, for wing torsion, the induced loads generally act to increase the motion, leading to a possible divergence or flutter condition.

In the case of flutter the oscillatory motion of the blade necessitates the use of unsteady aerodynamic theory. This theory introduces complex valued coefficients, which are functions of the reduced frequency (Strouhal Number), in the expressions for the aerodynamic loads. These coefficients alter the phase relations between the blade motions and the resulting aerodynamic loads, and can be very important in the prediction of flutter. For the analysis of divergence, which is a static phenomenon, the same equations apply, but the reduced frequency must be set to zero. Generally for VAWTs, flutter and divergence instabilities have not been an issue. However, during the design stage of a new turbine, it is always prudent to establish the flutter and divergence boundaries to avoid the catastrophic consequences associated with these phenomena.

For frequency response analysis aeroelasticity is important in establishing the level of aerodynamic damping. For VAWTs with high tip speeds aerodynamic damping can be substantial, leading to significant reductions in even the off-resonance response. Additionally, with the advent of modeling atmospheric turbulence, analysis procedures will have to accommodate dynamic response at all frequencies rather than just the integer multiples of the operating speed. Thus, to obtain accurate response levels near the natural frequencies of the rotor some reasonable estimate of the damping will be required. Since aerodynamic damping is at least as significant as the low level of structural damping that generally exists in VAWTs, it is important that it also be accounted for in the analysis.

The inclusion of the aeroelasticity is carried out by modifying the damping and stiffness matrices in the NASTRAN finite element code (using NASTRAN's "DMIG" input option). These modifications are incorporated with the Coriolis and Softening matrices required for modeling the rotating coordinate system effects. The stability and frequency response of the turbine are subsequently investigated using the appropriate NASTRAN solution procedure. Through the use of a specially designed preprocessor, which reads the usual NASTRAN input deck and adds appropriate cards to it, the incorporation of the aeroelastic effects has been made relatively transparent to the user.

A number of other investigators have addressed the issue of aeroelasticity in VAWTs [1,2,3] with good success. Although the approach is similar to the one used here, their work is based on a modal representation using generalized degrees of freedom. In addition, the phase relations between the structural motions and the induced aerodynamic loads are taken to be zero. The work presented here utilizes physical degrees of freedom, which simplifies the NASTRAN input of the aeroelasticity matrices. The phase relations between the structural motions and the induced loads, as prescribed by unsteady aerodynamic theory, are also retained.

The remainder of this paper includes sections which describe the theory used in the development of the aeroelasticity matrices, present and discuss specific results, and draw some conclusions.

AEROELASTICITY THEORY FOR VAWTS

In this analysis, a VAWT blade is visualized as a series of straight airfoil sections joined together to form the desired shape. The theory for the aeroelasticity of a wing structure is assumed to be applicable to each segment. An excellent presentation of the physics and the governing equations of subsonic aeroelasticity for wing structures can be found in [4]. The equations below are reproduced from that reference. As indicated above, unsteady aerodynamic theory is used in their development.

For subsonic flutter, the lifting force, L, and the moment about the center of twist, M, resulting from the motion of a blade segment, are given by

$$\begin{aligned}
 L &= a_0 \rho V^2 b \left\{ -C \frac{\dot{u}}{V} + C\theta + [C(1-2a)+1] \frac{b\dot{\theta}}{2V} - \frac{b}{2V^2} \ddot{u} - \frac{ab^2}{2V^2} \ddot{\theta} \right\} \\
 M &= a_0 \rho V^2 b \left\{ d_1 \left[-C \frac{\dot{u}}{V} + C\theta + C(1-2a) \frac{b\dot{\theta}}{2V} \right] \right. \\
 &\quad \left. + d_2 \left[\frac{b\dot{\theta}}{2V} - \frac{ab^2}{2V^2} \ddot{u} - \left(\frac{1}{8} + a^2 \right) \frac{b^3}{2V^2} \ddot{\theta} \right] \right\}
 \end{aligned} \tag{1}$$

where, referring to Figure 1,

- a_0 is the coefficient of lift (per radian),
- ρ is the air mass density,
- V is the air speed,
- b is the half chord length,
- a is the fraction of b that the center of twist is behind the half chord point,
- d_1 is the distance the center of pressure is ahead of the center of twist,
- d_2 is the distance the rear aerodynamic center of pressure is ahead of the center of twist,
- C is the Theodorsen function,
- u is the vertical wing motion,
- θ is the rotational wing motion about the center of twist.

The terms which are proportional to the second time derivatives of u and θ represent "apparent mass" effects (additional mass due to air entrainment by the blade). Since the air mass density is so much smaller than that of the blade, these terms have been neglected in this analysis. Also, the half chord point and center of twist of the blade section are taken to be colinear, rendering the quantity, a , to be zero. Incorporating these considerations, the equations for L and M become

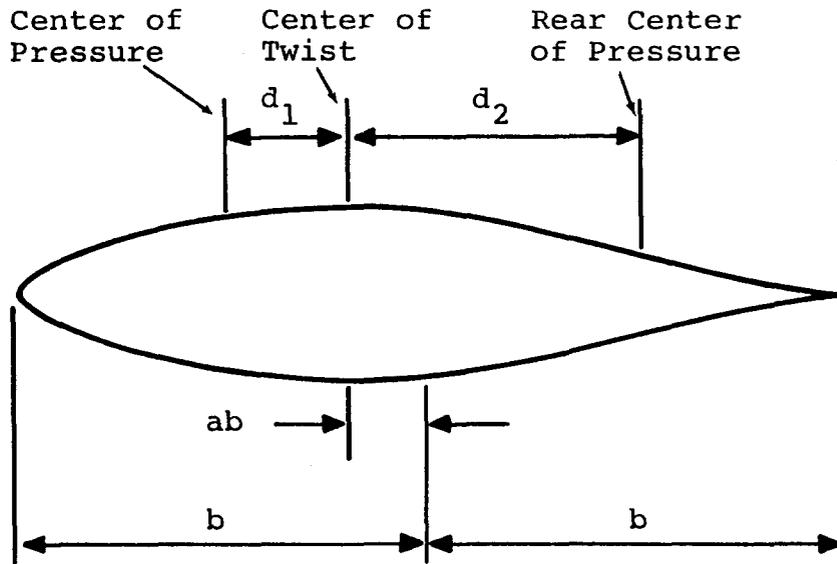


Figure 1. Blade Schematic.

$$L = a_0 \rho V^2 b \left[-C \frac{\dot{u}}{V} + C\theta + (1+C) \frac{b\dot{\theta}}{2V} \right] \quad (2)$$

$$M = a_0 \rho V^2 b \left[-d_1 C \frac{\dot{u}}{V} + d_1 C\theta + (d_1 C + d_2) \frac{b\dot{\theta}}{2V} \right]$$

Equation (2) can be specialized further by replacing V with $R\Omega$, where R is the radial distance from the tower to the blade location of interest, and Ω is the rotational speed of the turbine. With this approximation, only the relative air speed corresponding to the rotation of the rotor is taken into account in this aeroelasticity model. The free stream wind velocity is neglected. Also, for these computations, d_1 and d_2 are taken to be $b/2$ and $-b/2$, respectively. This places the center of pressure and rear center of pressure at the quarter chord and three quarter chord points, respectively.

The Theodorsen function, C , is of great importance for accurately predicting flutter in wing structures, but less so in VAWTs. It is a complex valued function of the reduced frequency, k , and therefore affects the phase relationships between the wing motions and the resulting aerodynamic loads. It is usually found in tabular form but can be reasonably approximated by

$$C(k) = \left[1 - \frac{.165k^2}{k^2 + (.0455)^2} - \frac{.335k^2}{k^2 + (.3)^2} \right]$$

$$-i \left[\frac{.165 \cdot .0455k}{k^2 + (.0455)^2} - \frac{.335 \cdot .3k}{k^2 + (.3)^2} \right]$$
(3)

where

$k = \frac{\omega b}{V}$ is the reduced frequency,

ω is the oscillatory frequency of the wing, i.e., the flutter frequency.

For flutter calculations, the value of ω used in the evaluation of the Theodorsen function should be set at the flutter frequency. As this frequency is not precisely known at the outset, some amount of manual iteration is required. To establish divergence conditions ω should be set to zero since divergence is a static phenomenon. For providing aerodynamic damping in frequency response computations, ω should be set to some characteristic frequency anticipated in the response, i.e. 3/rev.

In order to incorporate Equations (2) into NASTRAN, they are cast in a finite element form. This is accomplished using a Galerkin procedure. For the beam elements of which the VAWT blades are composed, the transverse and torsional degrees of freedom are assumed to vary linearly from one end of the element to the other. In the local element coordinate system, these motions are represented by

$$\begin{Bmatrix} u \\ \theta \end{Bmatrix} = \begin{bmatrix} 1-s & 0 & s & 0 \\ 0 & 1-s & 0 & s \end{bmatrix} \begin{Bmatrix} u_1 \\ \theta_1 \\ u_2 \\ \theta_2 \end{Bmatrix}$$

where the subscripts denote the motions at either end of the element, and s is the arc length measured along the element and normalized by the element length.

Inserting this approximation into Equations (2), premultiplying by the same linear shape functions, and integrating over the length of the beam element, the contributions to the element damping and stiffness matrices are obtained as shown below

Damping Matrix

$$\int_0^1 \frac{B}{V} \begin{bmatrix} -C(1-s)^2 & (1+C)\frac{b}{2}(1-s)^2 \\ -d_1 C(1-s)^2 & (d_2+d_1 C)\frac{b}{2}(1-s)^2 \\ -Cs(1-s) & (1+C)\frac{b}{2}s(1-s) \\ -d_1 Cs(1-s) & (d_2+d_1 C)\frac{b}{2}s(1-s) \end{bmatrix} ds \tag{4}$$

$$\begin{bmatrix} -Cs(1-s) & (1+C)\frac{b}{2}s(1-s) \\ -d_1 Cs(1-s) & (d_2+d_1 C)\frac{b}{2}s(1-s) \\ -Cs^2 & (1+C)\frac{b}{2}s^2 \\ -d_1 Cs^2 & (d_2+d_1 C)\frac{b}{2}s^2 \end{bmatrix} ds$$

Stiffness Matrix

$$\int_0^1 BC \begin{bmatrix} 0 & (1-s)^2 & 0 & s(1-s) \\ 0 & d_1(1-s)^2 & 0 & d_1 s(1-s) \\ 0 & s(1-s) & 0 & s^2 \\ 0 & d_1 s(1-s) & 0 & d_1 s^2 \end{bmatrix} ds$$

where

$$B = a_0 \rho V^2 bL,$$

L is the length of the element.

Note that the quantities, V , b , d_1 , d_2 , and C , may all be functions of s . The integrals are numerically evaluated using two-point Gaussian integration.

As NASTRAN's DMIG input option only allows one matrix to be input for each of the structural matrices, it is necessary to assemble all of the element contributions prior to NASTRAN input. Before this can be carried out, however, all of the individual element matrices must be transformed from the local frames in which they have been developed, to the global coordinate system.

Having provided these matrices to NASTRAN, flutter and divergence calculations are carried out using one of NASTRAN's complex eigenvalue solvers. Modes which are fluttering have negative damping coefficients, and divergent modes have null or negative frequencies. Frequency response analysis is accomplished in the usual manner using NASTRAN's frequency response solver.

PRESENTATION AND DISCUSSION OF RESULTS

To validate the analysis technique for predicting the onset of flutter, two test cases have been completed. First, the predicted flutter speed for a straight, uniform, cantilevered wing was compared to that obtained from an exact solution, and nearly perfect agreement was attained. Secondly, the flutter speed was computed for a specific configuration of the Sandia two meter VAWT, for which experimental flutter data has been obtained. The flutter prediction of 680 RPM is in good agreement with the observed value of 745 RPM, especially since the predicted result does not include any structural damping. The flutter mode was also correctly predicted.

Having established some credibility for the method, flutter predictions for the Sandia 34-m Test Bed VAWT design shown in Figure 2 have been made. A key innovation in this design is the variable blade section, which causes the rotor to stall at higher tip speeds. This permits higher operating speeds which reduce gear box loads and cost.

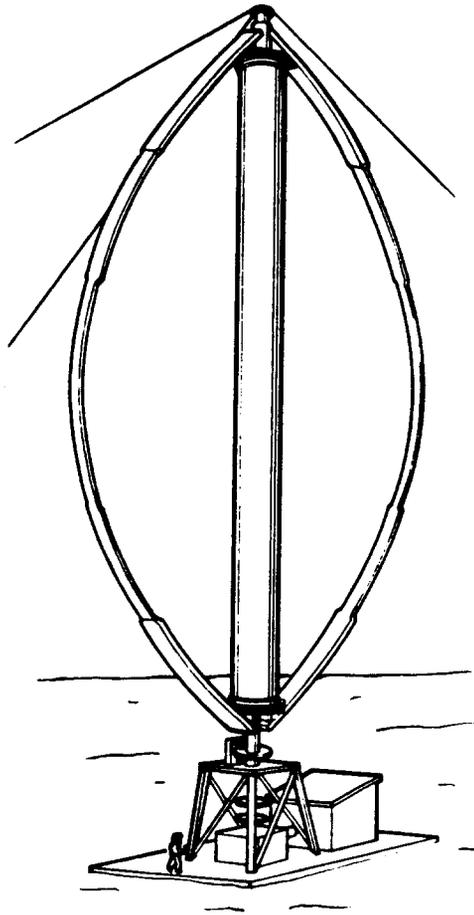


Figure 2. Artist's Concept of the Sandia 34-m Test Bed Design.

In Figure 3 the damping coefficient for the various modes of the turbine is plotted versus rotor RPM. The modes, which are characterized by their dominant behavior at 0 RPM, are identified by the labels to the right of the figure. The Pr or propeller modes are characterized by twisting motion of the rotor about the axis which is colinear with the tower. The F or flatwise modes primarily involve blade motion in the plane of the rotor with very little, if any, tower participation. The subscript, S, denotes symmetry in the motion of the two blades, and A, asymmetry. The B or butterfly modes consist of blade motion out of the plane of the rotor, which resembles the flapping of butterfly wings. This is usually coupled with some out-of-plane tower motion. And finally, the TI modes, or tower in plane modes, primarily involve tower motion in plane of the rotor.

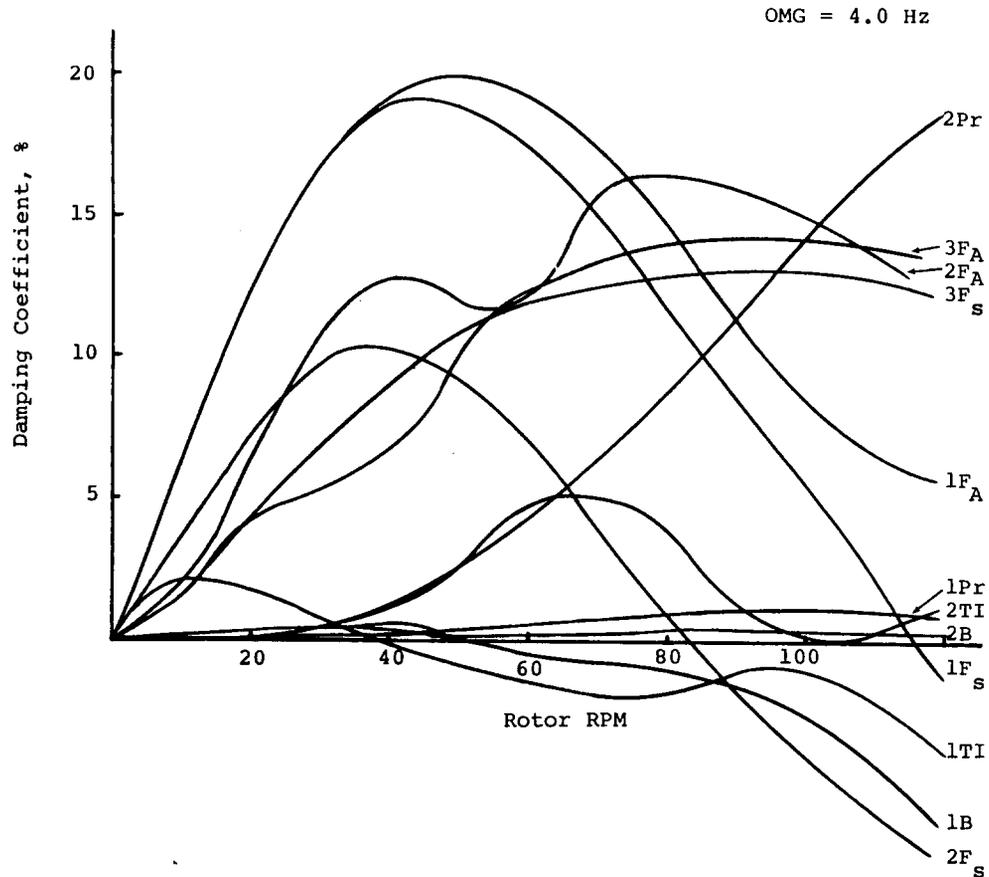


Figure 3. Damping Coefficients Versus RPM for the 34-m Test Bed, Aerodynamic Damping Only.

The damping coefficients shown in this figure correspond to percent of critical structural, rather than viscous damping. However, they derive totally from aeroelastic effects, i.e., no structural damping has been included. In computing these curves the oscillatory frequency, ω , was set at 4 hz, which corresponds to the frequency of the $2F_S$ mode as it crosses the axis at 82 RPM. Generally the flatwise modes are substantially damped over a large range of RPMs and eventually become unstable as they cross the axis. Other modes, such as the 1B and 1TI, become unstable at a relatively low RPM and remain modestly so out to higher rotational speeds. These are not as crucial as they might seem since, as will be shown, a small amount of structural damping stabilizes them. The mode that actually establishes the flutter speed is the flatwise mode that first goes unstable. As shown in Figure 3, this corresponds to the $2F_S$ mode and, consequently, the flutter speed for the Test Bed is predicted to be approximately 82 RPM. This is well above the operating speed range of 28 to 40 RPM.

In Figure 4 damping coefficients similar to those of Figure 3 are shown, except that in Figure 4, structural damping at a level of 2 percent of critical has been included. This level is consistent with values reduced from data taken from Sandia's two-meter VAWT [5]. In general, the primary effect of including the structural damping is that the curves for the various modes are raised by approximately the amount of damping specified. This tends to stabilize the 1B and 1TI modes and increases the flutter speed to 89 RPM.

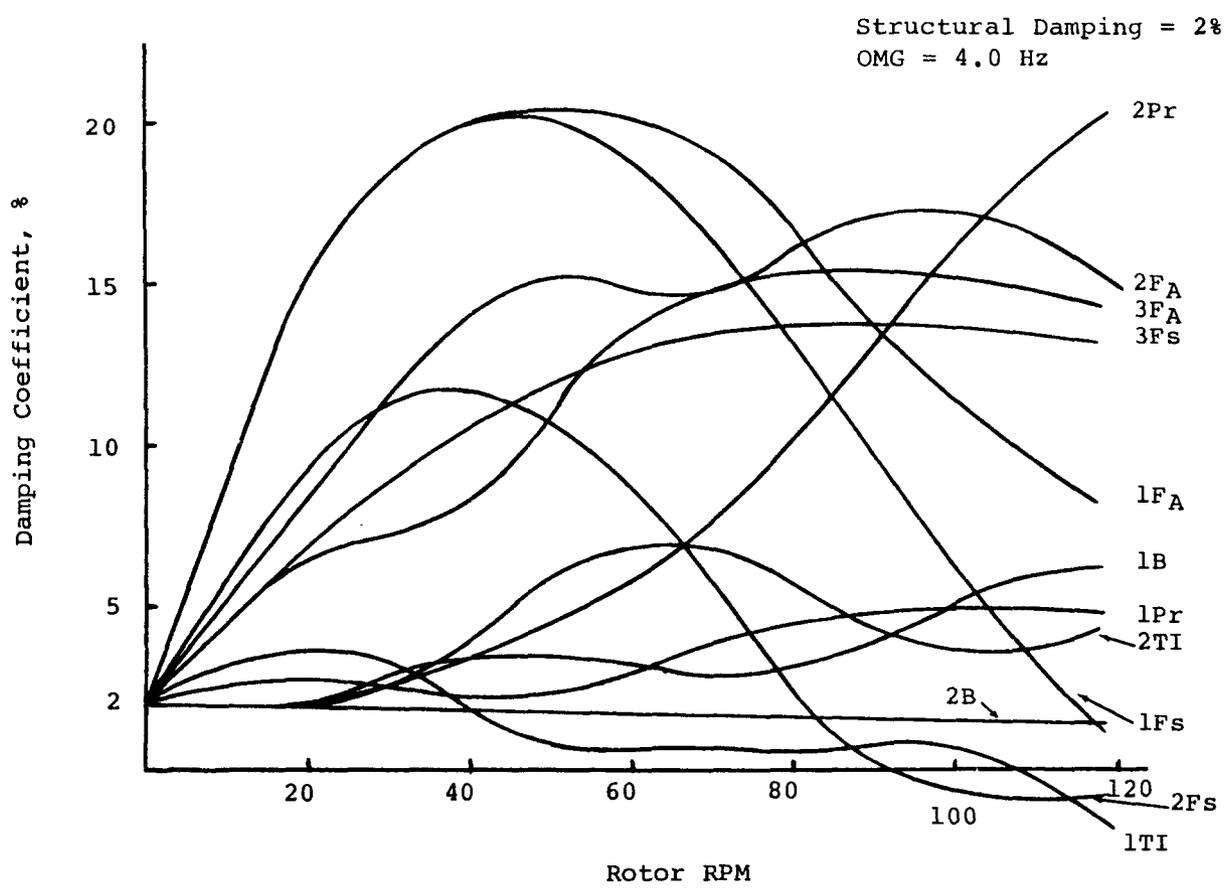


Figure 4. Damping Coefficients Versus RPM for the 34-m Test Bed, Aerodynamic Plus Structural Damping.

In an attempt to discern the role of the Theodorsen function in analyzing the aeroelastic behavior of VAWTs, ω was set to zero. For this value, the Theodorsen function is real rather than complex and has a value of unity. In this case, the predicted flutter speed becomes 84 RPM rather than 82, a modest difference.

However, damping factors are approximately 20 percent greater than previous values, which may lead to some degree of unconservatism in the predicted structural response.

To investigate the divergence characteristics of the Test Bed, the fanplot shown in Figure 5 was produced using a value of zero for ω . Actually the fanplot proved to be relatively insensitive to the value of ω used. The dashed P lines denote the forcing frequencies that are present at each RPM as a result of the rotor turning in a steady wind. Recalling that divergence is indicated by a natural frequency dropping to zero, there is no indication of divergence or even its onset from this figure. The descent of the frequency of the 1B mode is a result of the whirl instability rather than aeroelastic divergence.

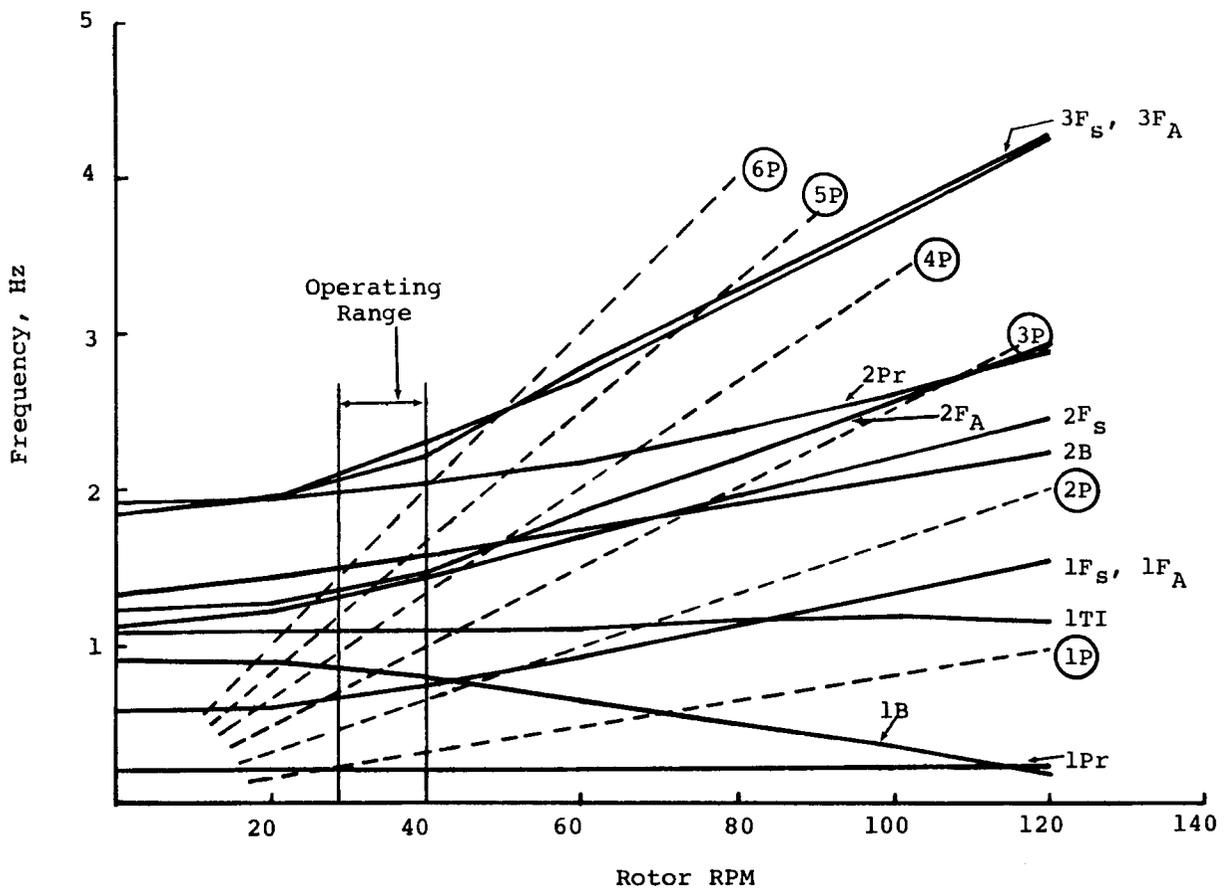


Figure 5. Fanplot for the 34-m Test Bed.

The effect of aerodynamic damping on the off-resonance response of a VAWT was determined by computing the response of the 34-m Test Bed with and without the aeroelasticity, at a rotational speed of 40 RPM. Results for the blade flatwise RMS stress versus vertical location are provided in Figure 6. The curves shown correspond to a wind speed of 20.11 m/s (45 MPH). As indicated, the aerodynamic damping provides an RMS peak stress reduction of approximately 20 percent. If the flatwise vibratory stresses happen to drive the fatigue life of the blade, this reduction would substantially increase its life.

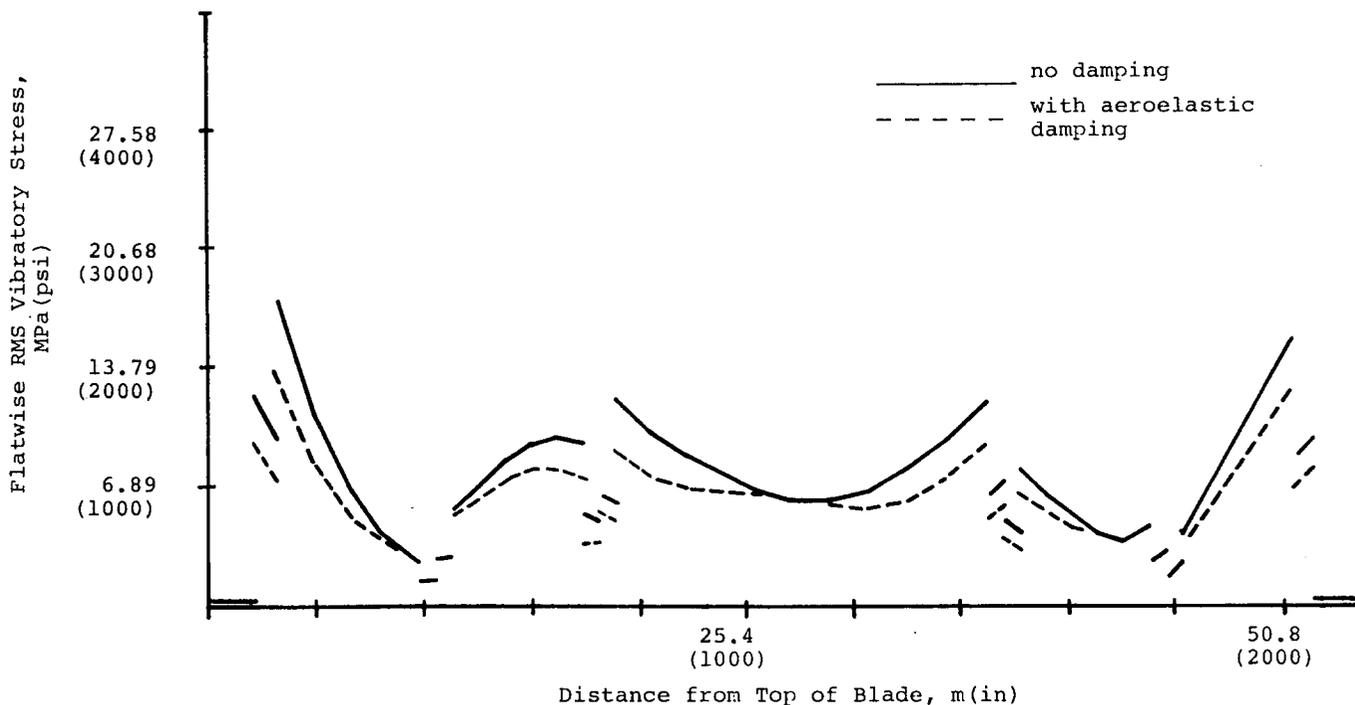


Figure 6. Effect of Aerodynamic Damping on Flatwise RMS Vibratory Stresses for the 34-m Test Bed.

CONCLUSIONS

Aeroelasticity can produce unstable behavior in VAWTs associated with the phenomena of flutter and divergence. The occurrence of divergence, however, is unlikely because of the additional torsional stiffness afforded the blade by its attachment to the tower at each end, in contrast to the cantilever design of an aircraft wing. Additionally, it is anticipated that the whirl instability point would always occur prior to the onset of divergence. The possibility of flutter is not as remote as divergence. However, predicted flutter speeds tend to be two to three times that of the operating speed. In any case, for a new turbine design, it is always prudent to establish the flutter speed in order to avoid the serious consequences of flutter, should it occur. The method described here provides a relatively simple and accurate means of accomplishing this.

The same method also provides a simple way to incorporate aerodynamic damping in frequency response analyses. As shown, aeroelasticity can produce damping factors associated with flatwise blade motion as high as 20 percent of critical. At these levels, even the off-resonance response can be significantly reduced. This suggests that an additional benefit of VAWT designs with higher tipspeeds may be a reduction in flatwise blade response due to higher damping levels.

REFERENCES

1. Ottens, H. H., and Zwaan, R. J., "Description of a Method to Calculate the Aeroelastic Stability of a Vertical Axis Wind Turbine," National Aerospace Laboratory NLR, The Netherlands, NLR TR 78072 L. (1978).
2. Vollan, A. J., "The Aeroelastic Behaviour of Large Darrieus-Type Wind Energy Converters Derived from the Behavior of a 5.5 m Rotor," Proceedings of the Second International Symposium on Wind Energy Systems, BHRA, Amsterdam (1978).
3. Popelka, D., "Aeroelastic Stability Analysis of a Darrieus Wind Turbine," Sandia National Laboratories, Albuquerque, NM, SAND82-0672 (1982).
4. Fung, Y. C., An Introduction to the Theory of Aeroelasticity, Dover Publications Inc., New York, 1969.
5. Carne, T. G., and Nord, A. R., "Modal Testing of a Rotating Wind Turbine," Sandia National Laboratories, Albuquerque, NM, SAND82-0631, Revised (1983).

DISTRIBUTION:

Alcoa Technical Center (5)
Aluminum Company of America
Attn: D. K. Ai
J. T. Huang
J. R. Jombock
M. Klingensmith
J. L. Prohaska
Alcoa Center, PA 15069

Alternative Sources of Energy
Attn: L. Stoiaken
Milaca, MN 56353

Amarillo College
Attn: E. Gilmore
Amarillo, TX 79100

American Wind Energy Association
1516 King Street
Alexandria, VA 22314

Arizona State University
University Library
Attn: M. E. Beecher
Tempe, AZ 85281

Trinity Western
Attn: Dr. A. S. Barker
7600 Glover Road
Langley, BC
CANADA V3A 4R9

Battelle-Pacific Northwest Laboratory
Attn: L. Wendell
PO Box 999
Richland, WA 99352

Bechtel Group, Inc.
Attn: B. Lessley
PO Box 3965
San Francisco, CA 94119

National Technical University
Department of Mechanical Engineering
Attn: Dr. George Bergeles
42, Patission Street
Athens, GREECE

Bonneville Power Administration
Attn: N. Butler
PO Box 3521
Portland, OR 97225

Burns & Roe, Inc.
Attn: G. A. Fontana
800 Kinderkamack Rd.
Oradell, NJ 07649

Canadian Standards Association
Attn: T. Watson
178 Rexdale Blvd.
Rexdale, Ontario, M9W 1R3
CANADA

University of Auckland
School of Engineering
Attn: V. A. L. Chasteau, Professor
Private Bag
Auckland, NEW ZEALAND

Colorado State University
Dept. of Civil Engineering
Attn: R. N. Meroney
Fort Collins, CO 80521

Commonwealth Electric Co.
Attn: D. W. Dunham
Box 368
Vineyard Haven, MA 02568

Curtis Associates
Attn: Gale B. Curtis
3089 Oro Blanco Drive
Colorado Springs, CO 80917

M. M. Curvin
11169 Loop Road
Soddy Saisy, TN 37379

Department of Economic Planning
and Development
Attn: G. N. Monsson
Barrett Building
Cheyenne, WY 82002

Otto de Vries
National Aerospace Laboratory
Anthony Fokkerweg 2
Amsterdam 1017
THE NETHERLANDS

US DOE/ALO
Energy Technology Liaison Office
NGD
Attn: Capt. J. L. Hanson, USAF
Albuquerque, NM 87115

US DOE Headquarters (20)
Wind/Oceans Technologies Division
1000 Independence Avenue
Washington D. C 20585
Attn: D. F. Ancona (10)
P. R. Goldman (10)

J. B. Dragt
Nederlands Energy Research Foundation
(E.C.N.)
Physics Department
Westerduinweg 3 Petten (nh)
THE NETHERLANDS

Dynergy Systems Corporation
821 West L Street
Los Banos, CA 93635
Attn: C. Fagundes

Dr. Norman E. Farb
10705 Providence Drive
Villa Park, CA 92667

Electric Power Research Institute (2)
3412 Hillview Avenue
Palo Alto, CA 94304
Attn: E. Demeo
F. Goodman

Alcir de Faro Orlando
Pontificia Universidade Catolica-PUC/Rj
Mechanical Engineering Department
R. Marques de S. Vicente 225
Rio de Janeiro, BRAZIL

FloWind Corporation (6)
Attn: H. M. Drees
S. Tremoulet
I. E. Vas
R. Watson
21249 72nd Avenue South
Kent, WA 98032

A. D. Garrad
Garrad Hasson
10 Northampton Square
London EC1M 5PA
UNITED KINGDOM

Gates Learjet
Mid-Continent Airport
Attn: G. D. Park
PO Box 7707
Wichita, KS 67277

H. Gerardin
Mechanical Engineering Department
Faculty of Sciences and Engineering
Universite Laval-Quebec, GIK 7P4
CANADA

University College of Swansea
Dept. of Mechanical Engineering
Attn: R. T. Griffiths
Singleton Park
Swansea, SA2 8PP
UNITED KINGDOM

Helion, Inc.
Attn: J. Park, President
Box 445
Brownsville, CA 95919

F. B. Im
1183 Quarry Lane
Pleasanton, CA 94566

Indal Technologies, Inc. (2)
Attn: L. Schienbein
C. Wood
3570 Hawkestone Road
Mississauga, Ontario
CANADA L6C 2V8

Institut de Recherche d'Hydro-Quebec (2)
Attn: Gaston Beaulieu
Bernard Masse
1800, Montee Ste-Julie
Varenes, Quebec, JOL 2PO
CANADA

Iowa State University
Attn: L. H. Soderholm
Agricultural Engineering, Room 213
Ames, IA 50010

West Wind Industries
Attn: K. Jackson
PO Box 1705
Davis, CA 95617

McAllester Financial
Attn: M. Jackson
1816 Summit
W. Lafayette, IN 47906

Kaiser Aluminum and Chemical
Sales, Inc.
Attn: A. A. Hagman
14200 Cottage Grove Avenue
Dolton, IL 60419

Kaiser Aluminum and Chemical
Sales, Inc.
Attn: D. D. Doerr
6177 Sunol Blvd.
PO Box 877
Pleasanton, CA 94566

Kansas State University
Electrical Engineering Department
Attn: Dr. G. L. Johnson
Manhattan, KS 66506

R. E. Kelland
The College of Trades and Technology
PO Box 1693
Prince Philip Drive
St. John's, Newfoundland, A1C 5P7
CANADA

KW Control Systems, Inc.
Attn: R. H. Klein
RD#4, Box 914C
South Plank Road
Middleton, NY 10940

Kalman Nagy Lehoczky
Cort Adellers GT. 30
Oslo 2, NORWAY

L. Liljidalh
Building 005, Room 304
Barc-West
Beltsville, MD 20705

Olle Ljungstrom
FFA, The Aeronautical Research
Institute
Box 11021
S-16111 Bromma, SWEDEN

R. Lynette & Assoc., Inc.
Attn: Robert Lynette
15921 SE 46th Way
Bellevue, WA 98006

Massachusetts Institute of Technology (2)
Attn: Professor N. D. Ham
W. L. Harris, Aero/Astro Dept.
77 Massachusetts Avenue
Cambridge, MA 02139

Pioneering R&D Laboratories
Composite Materials Laboratory
Attn: H. S. Matsuda
Toray Industries, Inc.
Sonoyama, Otsu, Shiga, JAPAN 520

US Wind Power
Attn: G. M. McNerney
1600 Wheeler Road
Burlington, MA 01803

Michigan State University
Division of Engineering Research
Attn: O. Krauss
East Lansing, MI 48825

Napier College of Commerce and
Technology
Tutor Librarian, Technology Faculty
Colinton Road
Edinburgh, EH10 5DT
ENGLAND

NASA Lewis Research Center (2)
Attn: D. Baldwin
J. Savino
21000 Brookpark Road
Cleveland, OH 44135

National Rural Electric
Cooperative Assn.
Attn: Wilson Prichett, III
1800 Massachusetts Avenue NW
Washington, DC 20036

Natural Power, Inc.
Attn: Leander Nichols
New Boston, NH 03070

Northwestern University
Dept. of Civil Engineering
Attn: R. A. Parmalee
Evanston, IL 60201

Ohio State University
Aeronautical and Astronautical Dept.
Attn: Professor G. Gregorek
2070 Neil Avenue
Columbus, OH 43210

Oklahoma State University
Mechanical Engineering Dept.
Attn: D. K. McLaughlin
Stillwater, OK 76074

Oregon State University (2)
Mechanical Engineering Dept.
Attn: R. W. Thresher
R. E. Wilson
Corvallis, OR 97331

Pacific Gas & Electric
Attn: T. Hillesland
3400 Crow Canyon Road
San Ramon, CA 94583

Ion Paraschivoiu
Department of Mechanical Engineering
Ecole Polytechnique
CP 6079
Succukrsale A
Montreal H3C 3A7
CANADA

Troels Friis Pederson
Riso National Laboratory
Postbox 49
DK-4000 Roskilde
DENMARK

Helge Peterson
Riso National Laboratory
DK-4000 Roskilde
DENMARK

The Power Company, Inc.
Attn: A. A. Nedd
PO Box 221
Genesee Depot, WI 53217

Power Technologies Inc.
Attn: Eric N. Hinrichsen
PO Box 1058
Schenectady, NY 12301-1058

Public Service Co. of New Hampshire
Attn: D. L. C. Frederick
1000 Elm Street
Manchester, NH 03106

Public Service Company of New Mexico
Attn: M. Lechner
PO Box 2267
Albuquerque, NM 87103

RANN, Inc.
Attn: A. J. Eggers, Jr.
260 Sheridan Ave., Suite 414
Palo Alto, CA 94306

The Resources Agency
Department of Water Resources
Energy Division
Attn: R. G. Ferreira
PO Box 388
Sacramento, CA 95802

Iowa State University
Aerospace Engineering Department
Attn: Dr. R. Ganesh Rajagopalan,
Asst Prof.
404 Town Engineering Bldg.
Ames, IA 50011

Reynolds Metals Company
Mill Products Division
Attn: G. E. Lennox
6601 West Broad Street
Richmond, VA 23261

Atlantic Wind Test Site
Attn: R. G. Richards
PO Box 189
Tignish P.E.I., COB 2B0
CANADA

Memorial University of Newfoundland
Faculty of Engineering and
Applied Sciences
Attn: A. Robb
St. John's Newfoundland, A1C 5S7
CANADA

Rockwell International (2)
Rocky Flats Plant
Attn: A. Trenka
PO Box 464
Golden, CO 80401

Dr. Ing. Hans Ruscheweyh
Institut fur Leichbau
Technische Hochschule Aachen
Wullnerstrasse 7
FEDERAL REPUBLIC OF GERMANY

Beatrice de Saint Louvent
Etablissement d'Etudes et de
Recherches
Meteorologigues
77 Rue de Servas
92106 Boulogne-Billancourt Cedex
FRANCE

National Atomic Museum
Librarian
Attn: Gwen Schreiner
Albuquerque, NM 87185

Arnan Seginer
Professor of Aerodynamics
Technion-Israel Institute of Technology
Department of Aeronautics Engineering
Haifa
ISRAEL

Wind Energy Abstracts
Attn: Farrell Smith Seiler, Editor
PO Box 3870
Bozeman, MT 59772-3870

Queen Mary College
Dept. of Aeronautical Engineering
Attn: David Sharpe
Mile End Road
London, E1 4NS
UNITED KINGDOM

Instituto Tecnologico Costa Rico
Attn: Kent Smith
Apartado 159 Cartago
COSTA RICA

Bent Sorenson
Roskilde University Center
Energy Group, Bldg. 17.2
IMFUFA
PO Box 260
DK-400 Roskilde
DENMARK

ADECON
Attn: Peter South
32 Rivalda Road
Weston, Ontario, M9M 2M3
CANADA

Southern California Edison
Research & Development Dept., Rm 497
Attn: R. L. Scheffler
PO Box 800
Rosemead, CA 91770

The University of Reading
Department of Engineering
Attn: G. Stacey
Whiteknights, Reading, RG6 2AY
ENGLAND

Stanford University
Dept. of Aeronautics and
Astronautics Mechanical Engineering
Attn: Holt Ashley
Stanford, CA 94305

Dr. Derek Taylor
Alternative Energy Group
Walton Hall
Open University
Milton Keynes, MK7 6AA
UNITED KINGDOM

Low Speed Aerodynamics Laboratory (3)
NRC-National Aeronautical Establishment
Attn: R. J. Templin
Montreal Road
Ottawa, Ontario, K1A 0R6
CANADA

Texas Tech University (2)
Mechanical Engineering Dept.
Attn: J. W. Oler
PO Box 4289
Lubbock, TX 79409

Tulane University
Dept of Mechanical Engineering
Attn: R. G. Watts
New Orleans, LA 70018

Tumac Industries, Inc.
6400 Ford Street
Attn: J. R. McConnell
Colorado Springs, CO 80915

Terrestrial Energy Technology
Program Office
Energy Conversion Branch
Aerospace Power Division/
Aero Propulsion Lab
Attn: J. M. Turner
Air Force System Command (AFSC)
Wright-Patterson AFB, OH 45433

United Engineers and Constructors, Inc.
Attn: A. J. Karalis
PO Box 8223
Philadelphia, PA 19101

Universal Data Systems
Attn: C. W. Dodd
5000 Bradford Drive
Huntsville, AL 35805

University of California
Institute of Geophysics
and Planetary Physics
Attn: Dr. P. J. Baum
Riverside, CA 92521

University of Colorado
Dept. of Aerospace Engineering Sciences
Attn: J. D. Fock, Jr.
Boulder, CO 80309

University of Massachusetts
Mechanical and Aerospace
Engineering Dept.
Attn: Dr. D. E. Cromack
Amherst, MA 01003

University of New Mexico
New Mexico Engineering
Research Institute
Attn: G. G. Leigh
Campus PO Box 25
Albuquerque, NM 87131

University of Oklahoma
Aero Engineering Department
Attn: K. Bergey
Norman, OK 73069

University of Sherbrooke (2)
Faculty of Applied Science
Attn: A. Laneville
P. Vittecoq
Sherbrooke, Quebec, J1K 2R1
CANADA

The University of Tennessee
Dept. of Electrical Engineering
Attn: T. W. Reddoch
Knoxville, TN 37916

USDA, Agricultural Research Service
Southwest Great Plains Research Center
Attn: Dr. R. N. Clark
Bushland, TX 79012

Utah Power and Light Co.
Attn: K. R. Rasmussen
51 East Main Street
PO Box 277
American Fork, UT 84003

W. A. Vachon & Associates
Attn: W. A. Vachon
PO Box 149
Manchester, MA 01944

VAWTPOWER, Inc.
Attn: P. N. Vosburgh
134 Rio Rancho Drive
Rio Rancho, NM 87124

Washington State University
Dept. of Electrical Engineering
Attn: F. K. Bechtel
Pullman, WA 99163

West Texas State University
Government Depository Library
Canyon, TX 79015
Number 613

West Texas State University
Department of Physics
Attn: V. Nelson
PO Box 248
Canyon, TX 79016

West Virginia University	1520	D. J. McCloskey
Dept of Aero Engineering	1522	R. C. Reuter, Jr.
Attn: R. Walters	1523	J. H. Biffle
1062 Kountz Avenue	1524	D. W. Lobitz
Morgantown, WV 26505	1600	R. G. Clem
	1630	R. C. Maydew
Central Lincoln People's Utility	1636	J. K. Cole
District	2525	R. P. Clark
Attn: D. Westlind	2542	W. N. Sullivan
2129 North Coast Highway	3160	J. E. Mitchell (15)
Newport, OR 97365-1795	3161	P. S. Wilson
	6000	E. H. Beckner
Wichita State University (2)	6200	V. L. Dugan
Aero Engineering Department	6220	D. G. Schueler
Attn: M. Snyder	6225	H. M. Dodd (50)
W. Wentz	6225	T. D. Ashwill
Wichita, KS 67208	6225	D. E. Berg
	6225	L. R. Gallo
Windy Energy Abstracts	6225	R. D. Grover
Attn: Farrell Smith Seiler	6225	P. C. Klimas
PO Box 3870	6225	D. S. Oscar
Bozeman, MT 59772	6225	M. E. Ralph
	6225	M. H. Worstell
Wind Power Digest	6256	H. J. Sutherland
Attn: Michael Evans	7111	J. W. Reed
PO Box 700	7544	D. R. Schafer
Bascom, OH 44809	7544	T. G. Carne
	7544	J. Lauffer
Wisconsin Division of State Energy	8024	P. W. Dean
Attn: Wind Program Manager	3141	S. A. Landenberger (5)
8th Floor	3151	W. L. Garner (3)
101 South Webster Street	3154-3	C. H. Dalin (28)
Madison, WI 53702		for DOE/OSTI (Unlimited Release)